

NOTES:

1. MATERIAL:

- 1-1. HOUSING & COVER: HIGH TEMPERATURE THERMOPLASTIC UL94V-0 COLOR: BLACK.
- 1-2. CONTACT : COPPER ALLOY.
- 1-3. SHELL : COPPER ALLOY.

2. FINISH:



- 2-1. CONTACT:
 - GOLD PLATING 30µ" ON CONTACT AREA.
 - *2.54 µm (100µ") MIN. BRIGHT-Sn PLATING ON SOLDER TAIL AREA.
 - *1.27µm (50µ") MIN. Ni UNDERPLATING OVERALL..
- 2-2. SHELL & GROUND TERMINAL:
 - 1.27 µm (50µ") MIN. NICKEL UNDER-PLATED OVER ALL

3. RECOMMENDED P.C.B THICKNESS: 1.6 mm

4. OTHER GENERAL SPECIFICIFICATIONS: DIN IEC 60603-7-1

5. FOR WAVE SOLDERING: LEAD-FREE PROCESS.

9. OPERATION TEMPERATURE: -40 °C ~ +85 °C

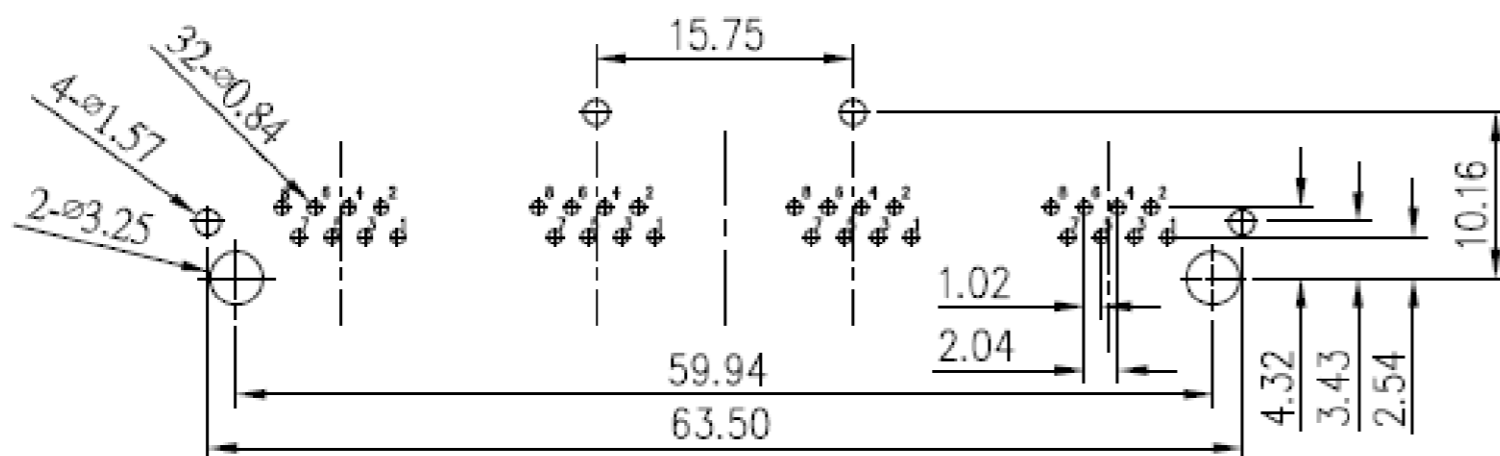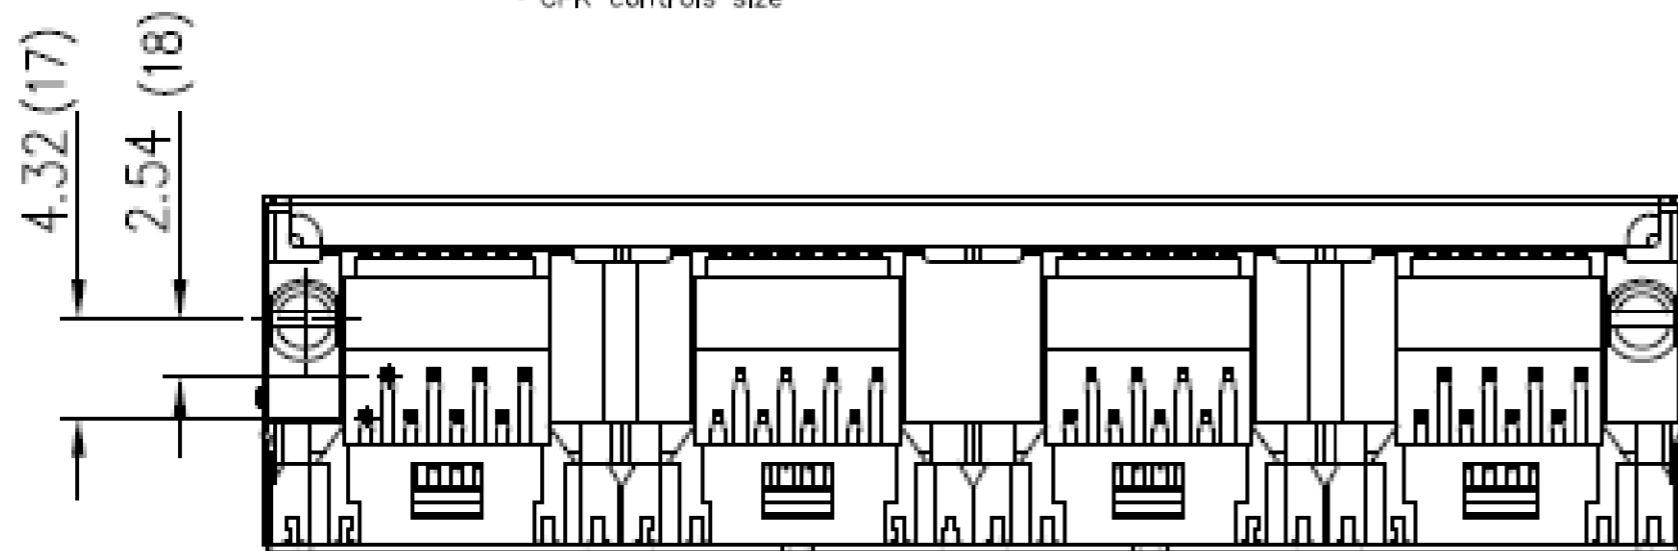

PCB LAYOUT

- 100% Critical Dimensions to be inspected 100%.
- Critical Dimensions.
- <SPC> Critical Dimensions. To determine Cmk & Cpk.

UNLESS OTHERWISE SPECIFIED : DIMENSIONS ARE IN MILLIMETERS

TOLERANCES:
ISO 2768-1 m
ISO 2768-2 K

CONFIDENTIAL Customer Drawing

RoHS compliant acc. to directive 2011/65/EU Specification/Drawing subject to alteration without prior notice.

The information contained in this drawing is the sole property of YAMAICHI ELECTRONICS DEUTSCHLAND GMBH. Any reproduction in part or whole without the written permission of YAMAICHI ELECTRONICS DEUTSCHLAND GMBH is prohibited.

REVISION	DESCRIPTION	ID	REV. DATE



ORDER / ARTICLE NO. 24-03264

DO NOT SCALE DRAWING

Description: RJ45 Jack 90° Tabup 8p8c
1 level 4 port, shielded, PA66

Purchase No.: RJ45-J9U8805-14G-NONLWTS

Drawing No.: CUSTOMER-P(090)A66 REVISION: 001

WEIGHT:

SUBREV01

SCALE: 2:1

SHEET 1 OF 1

DIN A3 - ASSEMBLY

Yamaichi acts with all markings of the product exclusively on behalf of the customer as service provider and not as distributor. Yamaichi is not aware of the customer's end use/application. The customer indemnifies Yamaichi from any liability towards third parties in connection with the marking - with the exception of the legal exclusions of liability according to § 309 No. 7 BGB.